


FulFill Wall Panel

Acoustical Fulfillment Wall Panels are an elegant, durable, high performing solution to control interior room reverberation. Our Wall Panels absorb across a wide range of frequencies, with varying levels corresponding on panel thickness.

APPLICATIONS:

These panels are in use in a wide range of spaces—recording studios, live performance venues, home theaters, houses of worship, multi-purpose rooms, gymnasiums, conference rooms, restaurants, and many more.


CORE SECTION

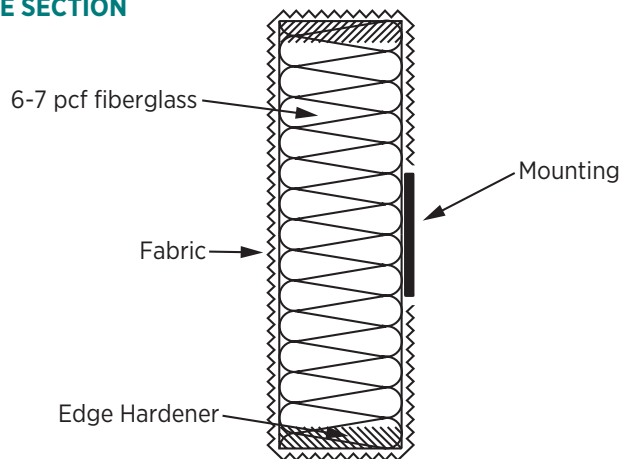

SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	N.R.C.
WP .5	.07	.09	.35	.77	.98	1.03	.55
WP .75	.04	.19	.59	.91	1.05	1.02	.70
WP 1	.10	.25	.84	1.08	1.13	1.11	.85
WP 1.5	.31	.58	1.03	1.10	1.05	1.04	.95
WP 2	.42	.89	1.12	1.07	1.10	1.09	1.05
WP 3	.75	.89	1.11	1.21	1.21	1.20	1.10
WP 4	.87	.87	1.24	1.26	1.26	1.25	1.15

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

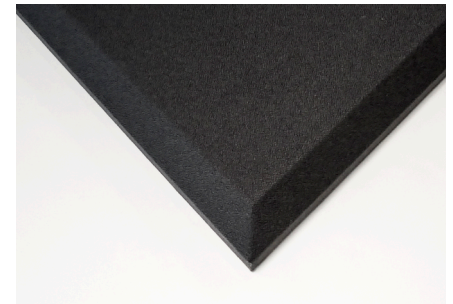

SPECIFICATIONS:

BASE Core:

6-7 pcf fiberglass
Thickness: 1/2" to 4"

Finish

Fabric

Sizes

Custom sizes and shapes up to 4' x 12' and 5' x 10'

Mounting Options

Adhesive, impaling clips, two-part Z-clips

Edges

Square, beveled, radiused
Hardened

Options

Foil backing

Flammability

All components have a Class "A" rating per ASTM E84