


## FulFill™ PERF Panel

The **FulFill™ PERF Panel** has a reflective, perforated sheet between the panel core and the fabric-wrapped finish. This allows for excellent absorption in the low and mid frequencies while leaving the high frequencies relatively unchanged. They perform quite differently than our traditional FulFill™ Acoustical Panels while looking exactly the same on the exterior.

They really shine as sidewall treatments in performance venues or houses of worship, allowing controlled reflections to return to the audience, creating a more unifying experience for them.


### CORE SECTION:

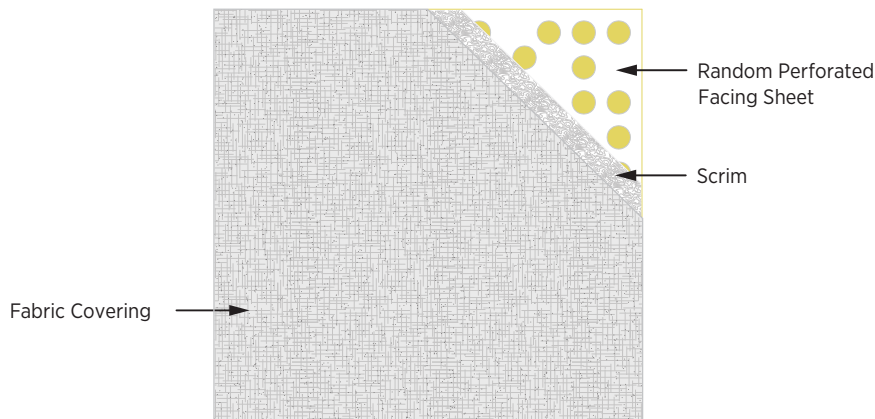

### SOUND ABSORPTION:

Hz	125	250	500	1000	2000	4000	NRC
PERF-1	.30	.68	.87	.86	.64	.48	.75
PERF-2	.77	.87	1.04	.77	.60	.48	.80
PERF-3	.92	.87	.88	.81	.65	.50	.80
PERF-4	.96	1.06	.99	.88	.68	.53	.90

**Note:** NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

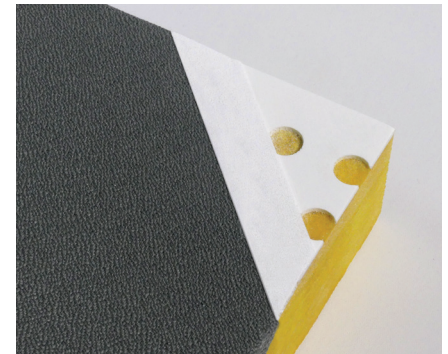

### SPECIFICATIONS:

#### Core

Random perforated facing sheet and scrim, 6-7 pcf fiberglass, 1"-4" thick

#### Sizes

Custom sizes and shapes up to 4' x 8'

#### Mounting

*Walls:* Impaling Clips, Two-part Clip System, Rotofast™ Snap-on Anchors,  
*Ceiling:* Painted Puck, T-Grid Mounting Brackets, Rotofast™ Cloud Anchors, Rotofast™ Snap-on Anchors, lay-in grid

#### Finish

Fabric

#### Edges

Square

#### Flammability

All components have a Class "A" rating per ASTM E84