


FulFill Series TACK Panel

The **FulFill Series TACK Panel** combines the excellent performance of our standard FulFill panel with a 1/8" high-density tackboard face which is laminated directly to our standard 6-7pcf fiberglass core with a fabric-wrapped finish. The tackboard facing is also impact resistant, making it a great choice for high traffic areas.

APPLICATION:

The panels are a great solution for rooms that need both acoustical performance as well as functional use, such as classrooms, libraries, conference rooms and similar high-traffic spaces.


CORE SECTION:

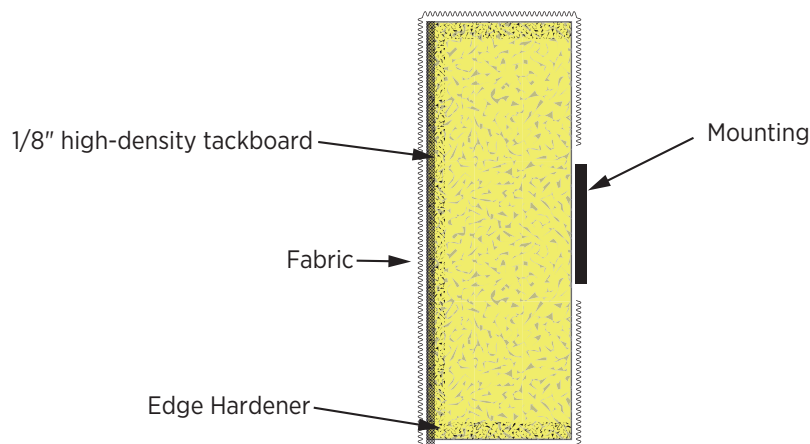

SOUND ABSORPTION:

Hz	125	250	500	1000	2000	4000	NRC
TACK 1.125	.27	.61	.98	.98	.93	.94	.90
TACK 2.125	.56	.92	1.17	1.12	1.11	1.07	1.10
TACK 3.125	.94	1.01	1.21	1.18	1.13	1.08	1.15
TACK 4.125	1.12	1.23	1.33	1.25	1.21	1.18	1.25

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

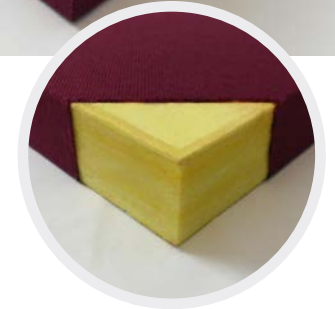

SPECIFICATIONS:

Core

6-7 pcf fiberglass,
1/8" high-density tackboard facing

Sizes

Custom sizes and shapes up to
4'x10'

Mounting

Impaling clips, two-part impaling clips
with z-bar

Finish

Fabric wrapped

Edges

Square, beveled

Flammability

All components have a
Class "A" rating per ASTM E84