


## PAINT Panel

Our **PAINT Panel** is a paintable version of our FulFill™ Acoustical Panel. The panel is made with the same 6-7pcf fiberglass core and finished with a paintable scrim that still allows for excellent acoustical absorption.

We are happy to paint panels for you using Sherwin Williams latex paint, or provide them unfinished for you to paint as desired.

### APPLICATION:

**PAINT Panels** are perfect for venues, houses of worship, conference rooms, sales floors, and any situation where the acoustical treatment needs to match or blend in with existing colors. Due to the painted finish, these panels should be installed where they are sure to be safe from contact.

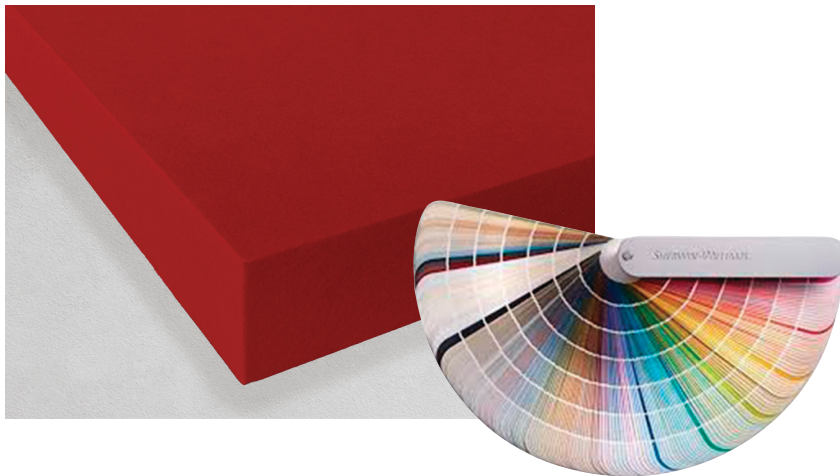

### SOUND ABSORPTION:

Hz	125	250	500	1000	2000	4000	NRC
<b>PAINT 1"</b>	0.09	0.39	.87	1.05	1.04	.088	0.85
<b>PAINT 2"</b>	0.54	0.82	1.16	1.12	1.03	0.94	1.05

**Note:** Testing was done using Sherwin Williams latex paint.

### SPECIFICATIONS:

#### Core

6-7 pcf fiberglass  
Thickness: 1" or 2"

#### Finish

Sherwin Williams Latex Paint  
or paintable scrim

#### Sizes

Custom sizes and shapes up to 4' x 10'

#### Mounting Options

*Walls:* Impaling Clips, Two-part Clip System,  
Rotofast™ Snap-on Anchors

*Ceiling:* Clear Pucks, Rotofast™ Cloud Anchors,  
lay-in grid

#### Edges

Square, beveled

#### Flammability

All components have a Class "A" rating  
per ASTM E84